



Equipment Specifications Model #:

Electrical Disconnect Selection:

- Square D Eaton No Disconnect*

*If no disconnect is selected, mounting holes and knockout locations may not line up with the pedestal.

Electrical Disconnect Duty:

- General Duty Heavy Duty


Electrical Disconnect Current Rating:

- 30 Amps 60 Amps

Electrical Disconnect Voltage Rating:

- 240V 600V

Electrical Disconnect Wire Options:

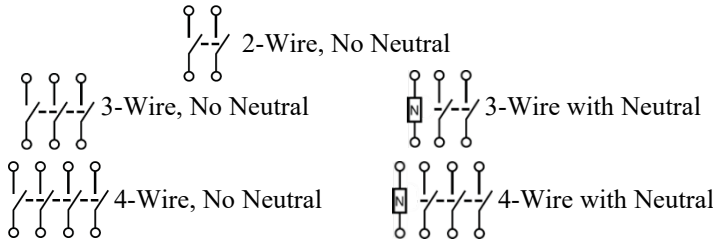

Electrical Disconnect Blade Type:

- Non-Fusible Fusible

Convenience Outlet:

- 120V WR Type GFCI Outlet *Flat WP Cover* *In-Use WP Cover*
 No Convenience Outlet
- WP = Weatherproof*
WR = Weather Resistant

Pre-Wired:


- Pre-Wired with 6' LFMC
 Will include the following:
- Installed wire from disconnect and optional GFCI to the to the included junction box.
 - Pre-Installed Liquidtight Flexible Metal Conduit, with included connectors and attachment.
 - All grounding wiring and connections.

- Not Pre-Wired

Additional Options:

- NEMA 4X (4X) Rough-In Only (R) Upper Section Only (U)

Model Numbers:

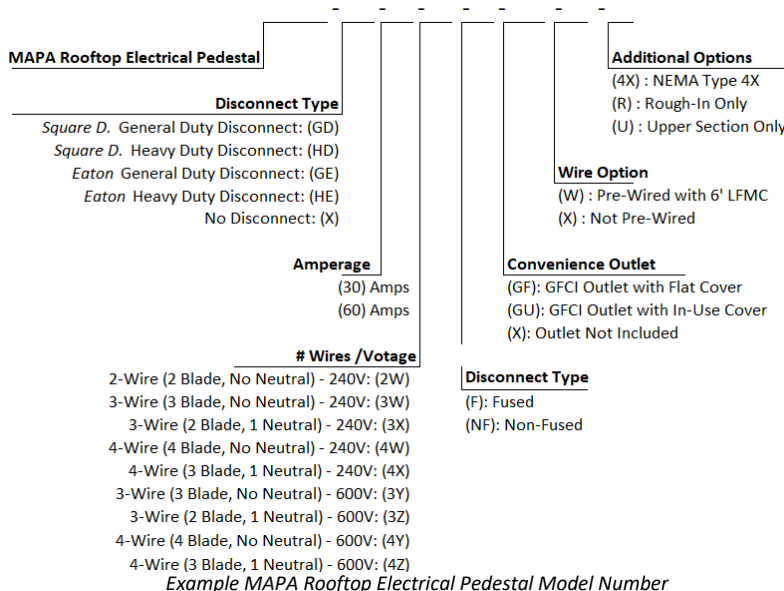

MAPA JOB #:



MAPA Rooftop Electrical Pedestal

Project Owner:

Project Name:

Project Address:

Notes: