


# **Engineering Submittal Form**

## **CERTIFIED FOR:**

Job Name:	Customer Name:
Location:	Customer P.O.:

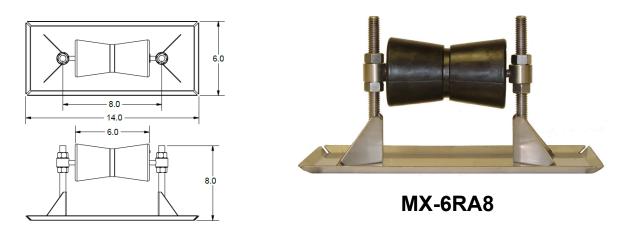

### **Recommended Usage:**

Use as a free standing; non-penetrating pipe support stand for all plumbing and mechanical piping systems installed on single ply or built-up roofs. For 6" IPS Pipe Size with weight load not to exceed 195lbs.

### MAPA Products Supports are designed and manufactured in accordance with MSS SP-58-2002 and MSS SP-69-2002.

Refer to MAPA Products "Recommended Installation Guidelines" for standard installation and spacing recommendations.

Composition:					
Roller Assembly	304 SS Collars & Shaft / SS ATR / UV Protected SBR Rubber Roller				
Base	304 SS 6" X 14"				
Rod Assembly	304 SS ATR				
Maximum Adjustability	3" to 8"				
Footprint	84 sq in.				
Weight Limit	252 lbs				
Typical Pipe & Size	Single 6" Sch. 40 or smaller Natural Gas				
	-				

### **Optional Accessories:**

- MWP 1018 9.2mm thick rubber walk pad.
- MPS-20 1" X 20" -Stainless steel pipe strap.

Certification Data										
Support Pad										
Options										
QTY	NP	Р	WP	Pipe Strap	Pipe Size	Service	Notes & Options			

Doc. #: M-13618