



**MODEL:**

---


**DESIGNATION:**

---

# MPG – Rooftop Gas Valve

**APPLICATION:**

The MAPA Products Rooftop Gas Valve with an optional quick disconnect and safety feature Weather Resistant Keyed Panic Button Assembly Controlling Series MS-300-120V Gas Solenoid. The pedestal’s integrally welded flashing flange enables seamless, weather-tight integration with the roof membrane using conventional roofing methods.

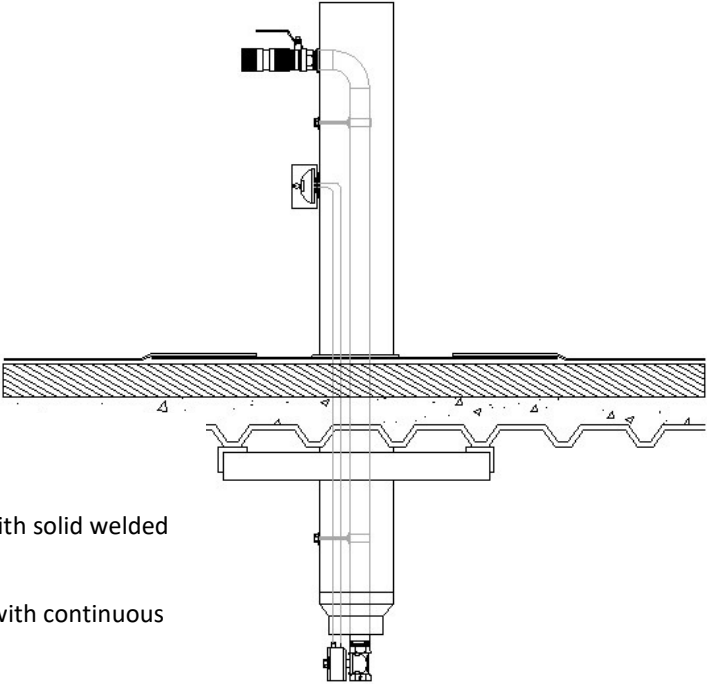

**STANDARD CONSTRUCTION & FEATURES:**

- Pedestal: 4" x 4" 11 gauge T-304 stainless square tubing with solid welded stainless steel cap
- Flashing Flange: 16" x 16" 16 gauge T-304 stainless sheet with continuous welded seam.
- Keyed Emergency Panic Button with Clear Protective Cover.

**MOUNTING OPTIONS:**

- SA Standard (Structurally Attached)
- D Deck Cap/Cap Flashing (Curb-mounted)

**SUPPLY CONNECTION:**

- 3/4"
- 1"
- 1 1/2"

**CUSTOM HEIGHT**

- Standard
- xx/yy \_\_\_\_\_ / \_\_\_\_\_  
INCHES ABOVE ROOF INCHES BELOW ROOF

**Additional option may include self-contained power supply with latching or low voltage solenoids.**  
*Custom configurations are available to meet specific design criteria. Contact the manufacturer.*  
*Pedestals are custom fabricated for specific project requirements and typically require a four (4) week lead-time after product submittal approval.*

**WARRANTY:** ISIMET/MAPA, LLC will repair or replace any defective parts or workmanship of this product for a period of one year from date of delivery. Damage caused by incorrect installation, alteration, or improper usage is not warranted. Recovery rights shall be limited to the total sum of the amounts paid for the product by the purchaser.  
**LIMITS OF LIABILITY:** ISIMET/MAPA, LLC’s liability shall be limited to costs of repair or replacement parts. Pedestals are not intended for usage other than those expressly described in this document. ISIMET/MAPA, LLC shall not be liable for damage or injury caused by the improper use of the product.